

Standard Series

Nickel-Cadmium

VRE Cs 1800

To expand its Ni-Cd offer, Saft has launched new High Energy Ni-Cd Cs cells, the VRE Cs 1800.

Developed to fit Professional electronics and home appliances, these cells are also perfectly designed for all equipment where an extended cycle life and a longer operating time are required.

To meet customers' requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

Applications

- Power tools
- Radio controls
- Lawn and gardening equipment
- Home appliances
- Payment terminals

Main advantages

- Cycling application
- Fast charge
- Extended cycle life
- Good charge retention

Technology

- Sintered positive electrode
- Plastic bonded negative electrode

Temperature range in discharge

- 20°C to + 60°C

Storage

Recommended: + 5°C to + 25°C

Relative humidity: 65 ± 5 %



Electrical characteristics

Nominal voltage [V]	1.2
Typical capacity [mAh]*	1800
IEC minimum capacity [mAh]*	1700
IEC designation	KRHR 23/43
Impedance at 1000 Hz [m Ω]	5

* Charge 16 h at C/10, discharge at C/5.

Dimensions

Diameter [mm]	22.0 + 0.15/- 0.05
Height [mm]	41.9 ± 0.3
Top projection [mm]	0.8 ± 0.2
Top flat area diameter [mm]	9.0 min
Weight [g]	49

Dimensions are given for bare cells.

Charge conditions

Rate	Time (h)	Temp. [°C]	Charge current [mA]
Fast*	~ 1	+ 10 to + 45	up to 1700
Standard	16	0 to + 50	170
Trickle**			45 to 80

* End of charge cut-off is requested: -dV or dT°C/dt.

** Trickle charge follows fast charge.

Maximum discharge current

Continuous [A] at + 20°C	17
Peak [A] at + 20°C*	130

* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.




SAFT


Typical performances

For graphs shown, C is the IEC₅ capacity.


Dimensions are in mm.

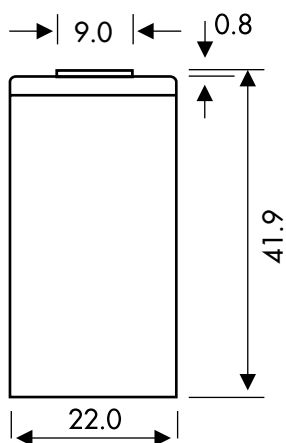


Charge at C/10 at different temperatures

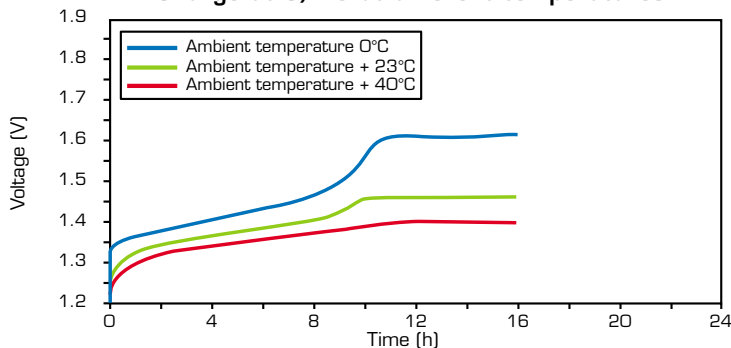


Charge at 1 C at different temperatures

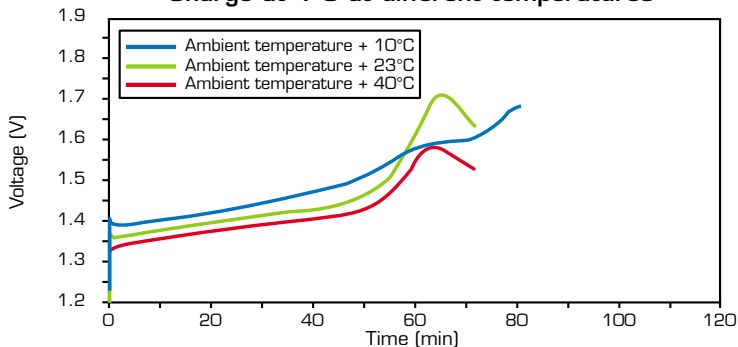

Discharge at different rates after charge at C/10

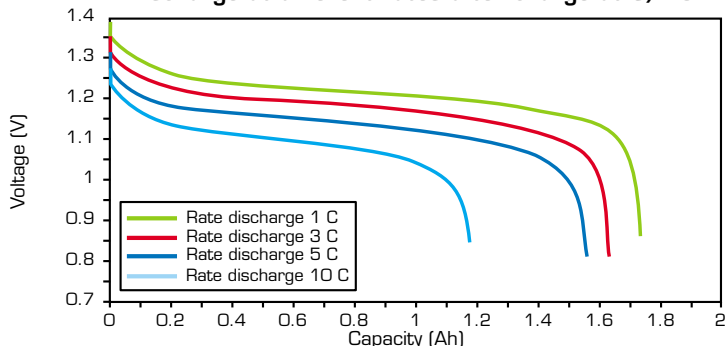

Discharge at different rates after charge at 1 C

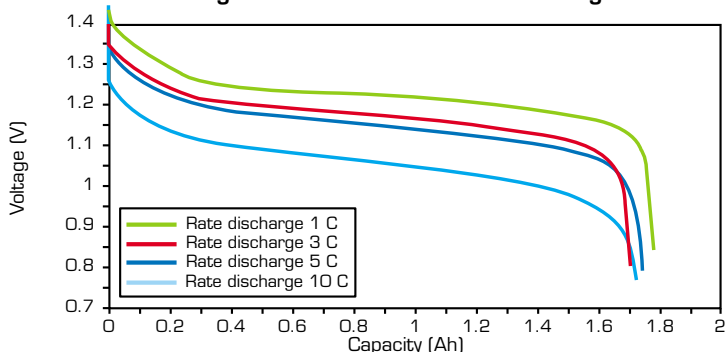

Data are given for single cells. Please consult Saft for any use of this cell in other conditions than those given in this data sheet.

Saft
Rechargeable Battery Systems
 12, rue Sadi Carnot
 93170 Bagnolet - France
 Tel.: +33 (0)1 49 93 19 18
 Fax: +33 (0)1 49 93 19 68
 Email: rbs.info@saftbatteries.com

www.saftbatteries.com

DOC N°11090-2-0309
 Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.
 Photo credits: Saft
 Published by the Communication Department
 Saft S.A. Stock capital 31.944.000
 RCS Bobigny B 383 703 873
 Designed by Soyouzgraphic.com

