

MHB MNG Series—Storage-type Gelled Battery


- High performance, completely maintenance-free, low self-discharge
- 100% precise quality testing, stable quality and high reliable performance
- Unique grid alloy formula and updated manufacturing technique
- Floating & standby use: up to 12 years
- Cycle use 1: Up to 350 cycles at 100% DOD
- Cycle use 2: Up to 1800 cycles at 50% DOD

Application:


- Telecommunications
- UPS/EPS
- DC PowerSupply
- Solar system
- Wind Power System
- Auto Control Sytem

Construction:


- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerABS
- CoverABS
- SealantEpoxy
- Safety valve Rubber
- TerminalCopper/Pb
- SeparatorFiber glass
- Electrolyte Sulfuric acid



M8 Bolt




T16 Terminal

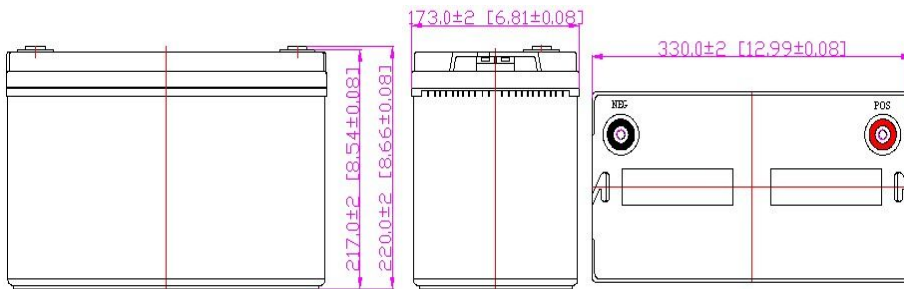


Speification:

Battery Model	MNG 90-12 12V90AH			
Designed Floating Life	Up to 10 Years			
Capacity (25°C)	20HR(4.78A,10.8V)	10HR(9.00A,10.8V)	5HR(17.51A,10.5V)	1HR(58.63A,10.5V)
	95.60AH	90.00AH	87.55AH	58.63AH
Dimensions	Length	Width	Height	Total Height
	330mm (12.99inch)	173mm (6.81inch)	215mm (8.46inch)	220mm (8.66inch)
Approx. Weight	27.40Kg (60.42 lbs)			
Internal Resistance	Full charged at 25°C: ≤4.5mΩ			
Self Discharge	2% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25oC)	Cycle use		Float use	
	14.4-14.6V(-30mV/°C), max. Current:27.0A		13.6-13.8V (-20mV/°C)	


Terminal Voltage (V) and Discharge Time

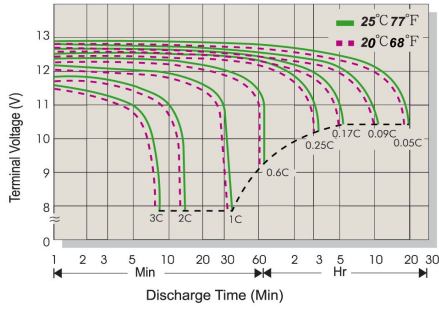


Capacity Retention Characteristic

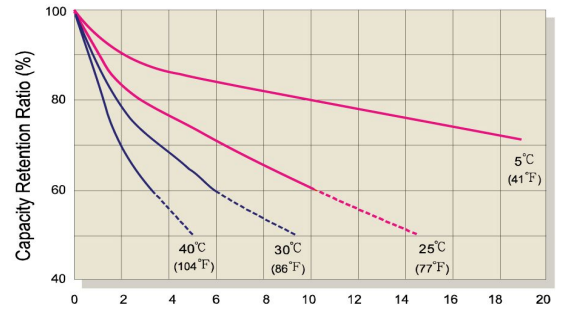


Battery Voltage and Charge Time for Standby Use

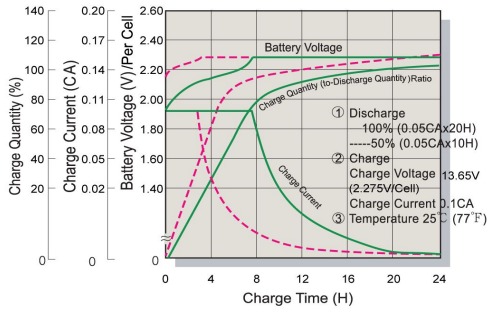


Battery Voltage and Charge Time for Cycle Use

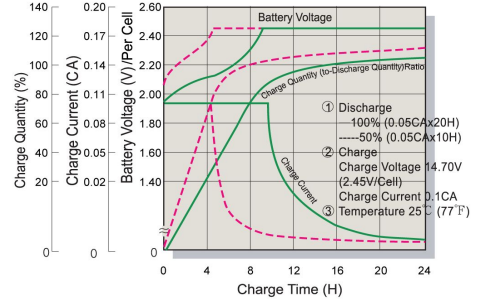

Tickle(or Float) Service Life

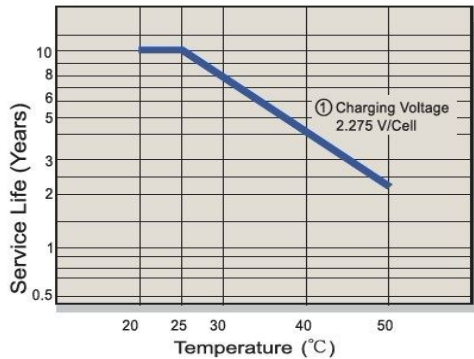

Cycle Service Life

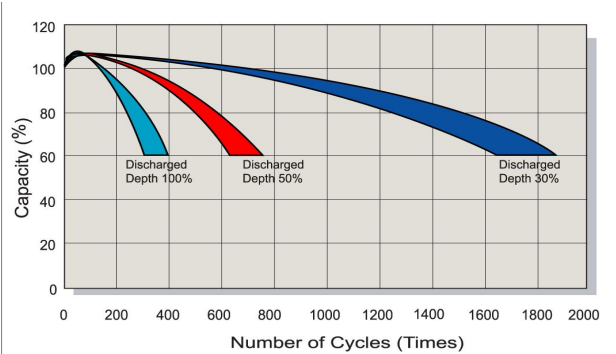

Constant Current Discharge(CC,Unit:A) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	319.93	188.86	148.44	96.76	56.47	32.64	25.07	20.58	16.87	13.75	8.84	4.69
1.80V/Cell	326.04	192.47	151.27	98.61	57.55	33.27	25.55	20.98	17.19	14.01	9.00	4.78
1.75V/Cell	332.15	196.08	154.11	100.46	58.63	33.89	26.03	21.37	17.51	14.28	9.18	4.87
1.70V/Cell	362.05	207.84	163.35	104.46	59.66	34.49	26.48	21.75	17.82	14.53	9.34	4.95
1.67V/Cell	398.59	225.49	177.22	110.30	60.30	34.86	26.77	21.98	18.01	14.68	9.44	5.00

Constant Power Discharge (CP,Unit:W) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	623.87	368.28	289.45	188.68	110.12	63.66	48.88	40.14	32.89	26.81	17.24	9.14
1.80V/Cell	635.78	375.31	294.98	192.28	112.22	64.87	49.82	40.91	33.52	27.33	17.55	9.31
1.75V/Cell	647.70	382.35	300.51	195.89	114.32	66.09	50.75	41.67	34.15	27.84	17.90	9.49
1.70V/Cell	705.99	405.29	318.54	203.71	116.34	67.25	51.64	42.41	34.75	28.33	18.22	9.65
1.67V/Cell	777.24	439.70	345.58	215.09	117.58	67.97	52.20	42.86	35.12	28.63	18.41	9.76